



Open case and remove the three microphone pole segments (1), tool case (2), windshield (3), microphone and cable (4)



Remove the bush (5) (x2) from the pole connectors by loosening the grub screw with the hex key from the tool case. Place bush in holes (x2) of middle pole segment.

Connect the three microphone pole segments. Secure by tightening grub screws in bush.



Connect the microphone pole to the case using two screws from the tool case




Connect the microphone cable to the connector plate. Secure microphone cable to pole using black clips. Black clips stored in tool case. Attach wind shield to microphone.

Locate the T-slot nut at the top of the microphone pole and remove the screw. Locate the microphone on top of the pole and secure using screw.



Sonitus EM2010 Pack Down



Turn unit off using switch



Remove the microphone cable from the connector plate. Remove black cable clips from pole.



Remove the microphone from the pole by removing the screw. Secure screw back into T-slot nut. Place black cable clips in tool case.

Dismantle pole into three segments by loosening 2x grub screws in middle segment. Remove bushes from pole.



Remove the two screws which attach the mounting plate to the case. Leave the plate attached to the pole.




Secure bushes (x2) to connector pins



Clip microphone to base pole segment

Place three microphone pole segments into front section of Sonitus case. Ensure microphone is on top

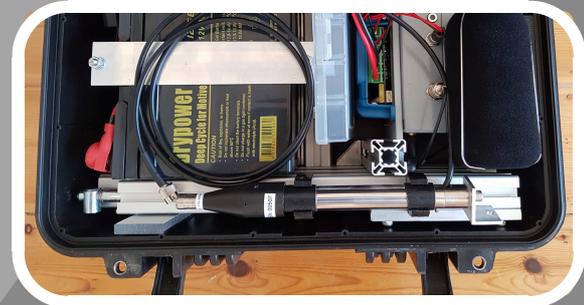

Place remaining items - windshield and tool case - into Sonitus case.



Place hex key, 2x screws, 2x washers and 3x black cable clips into tool case.